


วิธีตั้งค่า 3G Wireless router

1. เข้า web browser



ใส่ http://10.0.0.138 ที่ช่อง address bar



จะขึ้นหน้าต่างให้ใส่ username / password ให้ใส่ admin ทั้ง 2 ช่อง

2. เลือก Wi-Fi > Settings

Wi-Fi

Settings

Wi-Fi > Settings

This page allows you to configure your Wi-Fi settings. You can enable or disable the wireless LAN interface, hide the network from active scans, set the wireless network name (also known as SSID) and restrict the channel set based on country requirements. Click "Apply/Save" to configure the basic wireless options.

Enable Wi-Fi

Enable SSID Broadcast

Clients Isolation

Enables the wireless (Wi-Fi) network name to be broadcasted publicly to any wireless users within wireless range of your network. Disabling the SSID broadcast makes the network name private and provides enhanced security by requiring wireless users to enter the network name manually when creating a wireless network profile on their computers.

SSID: 1

BSSID: 00:1A:2B:81:3D:05

Country: 2

Max Clients:

Wireless - Guest/Virtual Access Points:

Enabled	SSID	Hidden	Isolate Clients	Max Clients	BSSID
<input type="checkbox"/>	wl0_Guest1	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	wl0_Guest2	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	wl0_Guest3	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A

3

2.1 ช่อง SSID ให้ใส่ sdxxx

2.2 ช่อง Country ให้เลือก Thailand

2.3 กดปุ่ม Apply/Save

- Wi-Fi
- Settings
- Security

3. เลือก Wi-Fi > Security



Wi-Fi > Security

This page allows you to configure security features of the wireless LAN interface. You may setup configuration manually

Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength. Click "Apply/Save" when done.

Select SSID:

Network Authentication:

WPA Pre-Shared Key: [Click here to display](#) 1

WPA Group Rekey Interval:

WPA Encryption:


WEP Encryption:


2

3.1 ช่อง WPA Pre-Shared Key (Password สำหรับเชื่อมต่อ Wi-Fi) ให้ใส่ tdd.xxxx

3.2 กดปุ่มApply/Save

4. เลือก Advance Settings > Access Control > Password

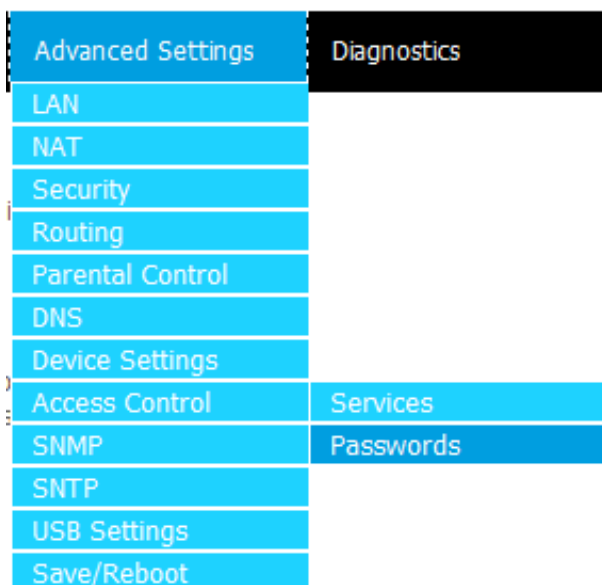

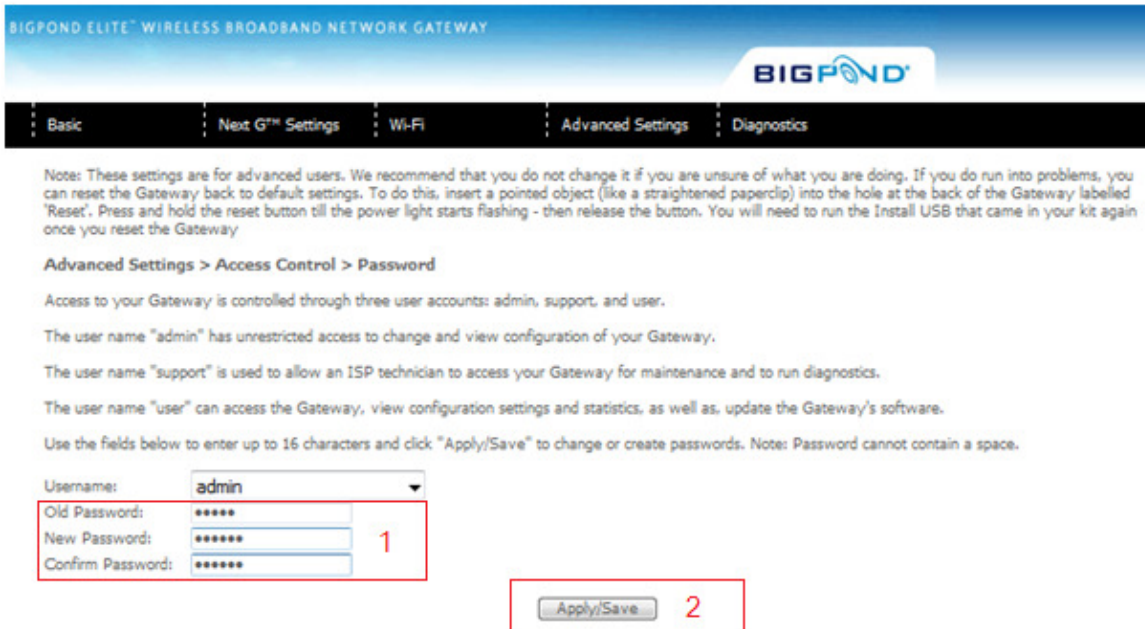


4.1 ช่อง Old Password ให้ใส่ Password เดิม (admin)

ช่อง New Password และ Confirm Password ให้ใส่ sdroot

4.2 กด Apply/Save

Advanced Settings

5. เลือก Advanced Settings > LAN LAN

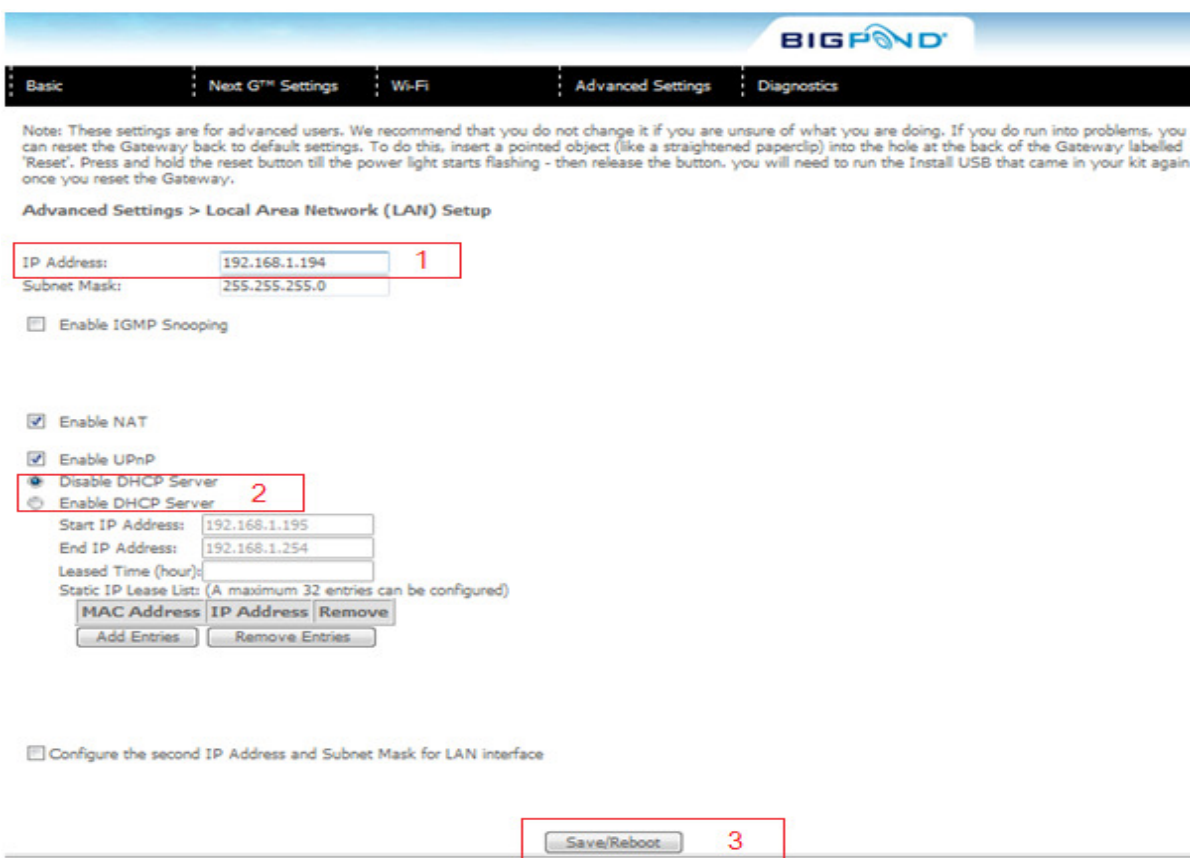

5.1 ช่อง IP Address ให้ใส่ 192.168.1.194

5.2 เลือก Disable DHCP Server

5.3 กดปุ่ม Save/Reboot

Basic

Next G™ Settings

Wi-Fi

Advanced Settings

Diagnostics

Next G™ Settings > Setup

Profile: Authentication Method: IP Compression: Data Compression: All Bands/Automatic 3G-850 Only 3G-2100 Only 3G-850/2G-900/1800 3G-ALL 2G-ALL